

Atria 6 - W+RGB



6-inch Cylinder utilizing Meteor Lighting's proprietary ColorFlip™ W + RGB solution, that gives you True White light and unlimited RGB possibilities. This product is compatible with all DMX control systems and follows ANSI E1.20 RDM protocol. You can now get white and RGB colors all from a single light source.



Quantity		Type	
Project		Note	

Electrical System

- 50W / W=25W, RGB=25W
- 100W / W=50W, RGB=50W
- Power Input: Universal (120-277V)
- Operating Temperature: -13°F~112°F
- Surge Protection: 4KV
- Power factor greater than 0.9

LED Technology

- White: CCT 3000K
- 85 CRI
- Beam Angle: 60°, WD
- Glowing Ring Option
- Rated Life > 60,000 hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- **DMX:** high resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Diameter: 6.4" (164mm)
- Height: 15" (381mm)
- Material: Aluminum
- Weight: 19.8 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Aircraft Cable 10ft
- Yoke Mount (AC/Dimming cable length: Standard / 6ft)

Warranty

- 5 years limited warranty.

Listing

- ETL Damp Location Listed
- FCC
- CE





Atria 6 - W+RGB



How To Specify:

Ordering Example: **AS6-100-308C-U-DMX-60-STD-B-SUM**

Model	Wattage	CCT / CRI	Voltage	Dimming
AS6		308C	U	
AS6	50 50W	308C 3000K / CRI85+RGB	U 120-277V	DMX DMX dims to 0.1% (XLR Sockets)
Atria 6 W+RGB	100 100W			DMX(RJ45) DMX dims to 0.1% (RJ45 Sockets)

Beam Angle	Finish	Rim Finish	Mounting	Accessories
60 60°	BLK Black		SUM Surface Mount	SPD¹ Surge Protector
WD* WIDE	WHT White	STD Without Ring	ST2 Stem 2ft	DF² Diffuser
			ST4 Stem 4ft	
		GLR Glowing Ring	AD10 Adjustable Cable 10ft	
			YKM Yoke Mount	
Please factor in change in lumen output with diffuser (-20% with WD; -12% with other degrees).			*Wall Mount DMX wiring is through 2 DMX Positive / Negative wires	¹ Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries. ² Please factor in change in lumen output with diffuser (-20% with WD; -12% with other degrees).

Atria 6 - W+RGB



Delivered Lumens*


Wattage \ CCT	50W		100W	
	Beam Angle: 60°			
R	8 W	119 lm	17 W	220 lm
G	8 W	810 lm	17 W	1720 lm
B	8 W	98 lm	17 W	210 lm
W	25 W	2006 lm	50 W	4050 lm

*Tolerance±8%



Current Consumption

Wattage \ Volt	120V	277V
50W	0.45A	0.19A
100W	0.89A	0.38A

Dimensions



Mounting Options

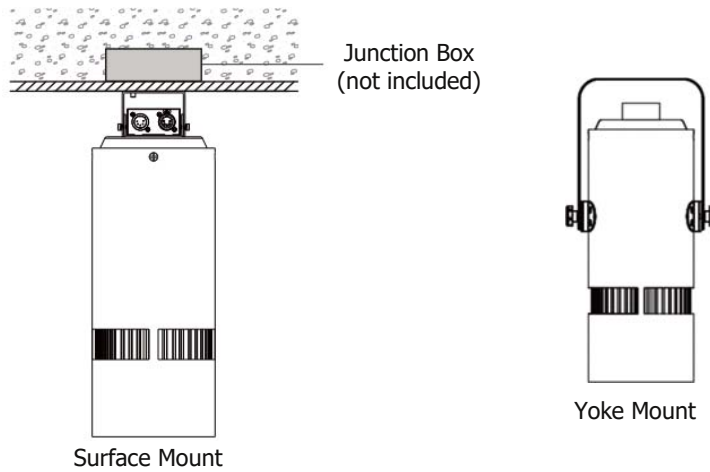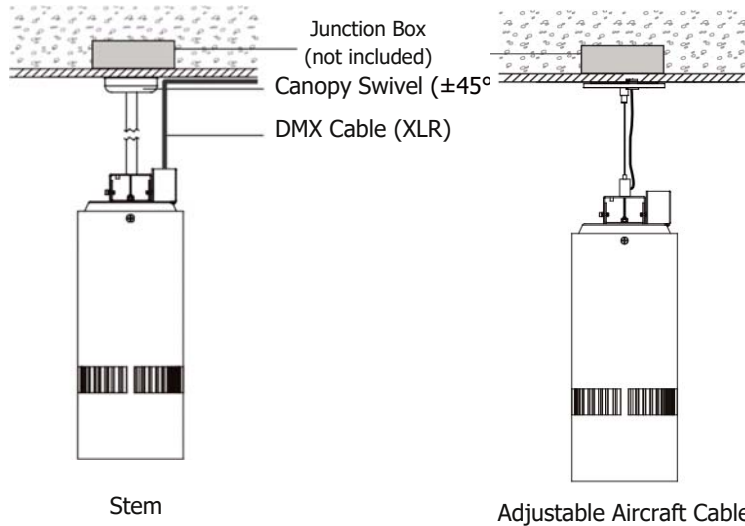

Atria 6 - W+RGB



DMX Requirements

The AS6 W+RGB fixture with DMX is a FOUR CHANNELS DMX unit.

When placing order, please indicate DMX address. (The DMX address will be listed on the back of the fixture.)


The LED fixture provide RJ45 Socket or XLR socket to connect. (DMX cable NOT included.)

The final fixture should be terminated by the use of DMX Terminator (by others).


Fixture	DMX Address			
	Red Control (ex. X)	Green Control (ex. X+1)	Blue Control (ex. X+2)	White Control (ex. X+3)
#1	1	2	3	4
#2	5	6	7	8
#3	9	10	11	12

The LED fixture provide RJ45 Socket or XLR socket to connect. (DMX cable NOT included.) The final fixture should be terminated by the use of DMX Terminator (by others).


RJ45 Sockets




XLR Sockets



CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN(PIN 8)	PIN 1
Signal -	ORANGE(PIN 2)	PIN 2
Signal +	WHITE/ORANGE(PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5



Connect DMX by using a standard shielded CAT5/6 cable.



Connect DMX by using a standard DMX512 XLR cable with 5 pin in/out connector (by others).