

DOT 2.5 - Warm Dim



New Dot 2.5 aperture micro cylinders with up to 1000 lumen output package. Smooth Dim to Dark compatibility with Ward Dim Color Tuning.

Quantity	Type
Project	Note

Delivered Lumens

Warm Dim	1900K						2700K
0-10V CCT Voltage	0.7	2	4	6	8	10	
15W	50 lm	180 lm	350 lm	550 lm	750 lm	1000 lm	

*Tolerance±8%

Electrical System

- 1000 lm (15W)
- Power Input: Universal (120-277V)
- Operating Temperature: 14°F~95°F
- Surge Protection: 2.5KV

LED Technology

- Warm Dim™ (Tuning White: 1900K ↔ 2700K)
- 93 CRI
- UGR ≤19
- Beam Angle: 15°, 25°, 40°, 55°

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

Housing

- Diameter: 2.5" (60mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.9 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft
- Wall Mount
- Surface Adjustable

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE



DOT 2.5 - Warm Dim








How To Specify:


Ordering Example: DT2-15-WDIM-UNV-STV-15-BLK-BLK-SUM

4-5 weeks lead time on over 75% of specifications.

Model	Wattage	CCT / CRI	Voltage	Dimming
DT2		WDIM	UNV	
DT 2 DOT 2.5"	15 15W	WDIM 1900K - 2700K	UNV 120-277V	STV Standard 0-10V dims to 10% SPV Superior 0-10V dims to dark TRC TRIAC dims to 1% (120V ONLY)

Beam Angle	Finish	Trim Finish	Mounting	Accessories
15 15°	BLK Black	BLK Black	SUM Surface Mount	HC¹ Honey Comb
25 25°	WHT White	WHT White	ST2 Stem 2ft	SL² Solite Lens
35 35°	SLV Silver	SLV Silver	ST4 Stem 4ft	
45 45°		GLD Gold	PL2¹ Power Line Mount 2ft	¹ Please factor in change in lumen output of -30%
60 60°		BL Blue	PL4¹ Power Line Mount 4ft	² Please factor in change in lumen output of -15%.
		 Black	PL6¹ Power Line Mount 6ft	
		 WHT	PL8¹ Power Line Mount 8ft	
		 SLV	PL10¹ Power Line Mount 10ft	
		 GLD	CM10 Cord Mount 10ft	
		 Blue	WLM Wall Mount	
			SA Surface Adjustable	
			¹ Option only available with Remote Power	

Dimensions




Current Consumption


Wattage \ Volt	120V	277V
15W	0.14A	0.06A

Mounting Options

(Canopy Dimensions are the same for all)

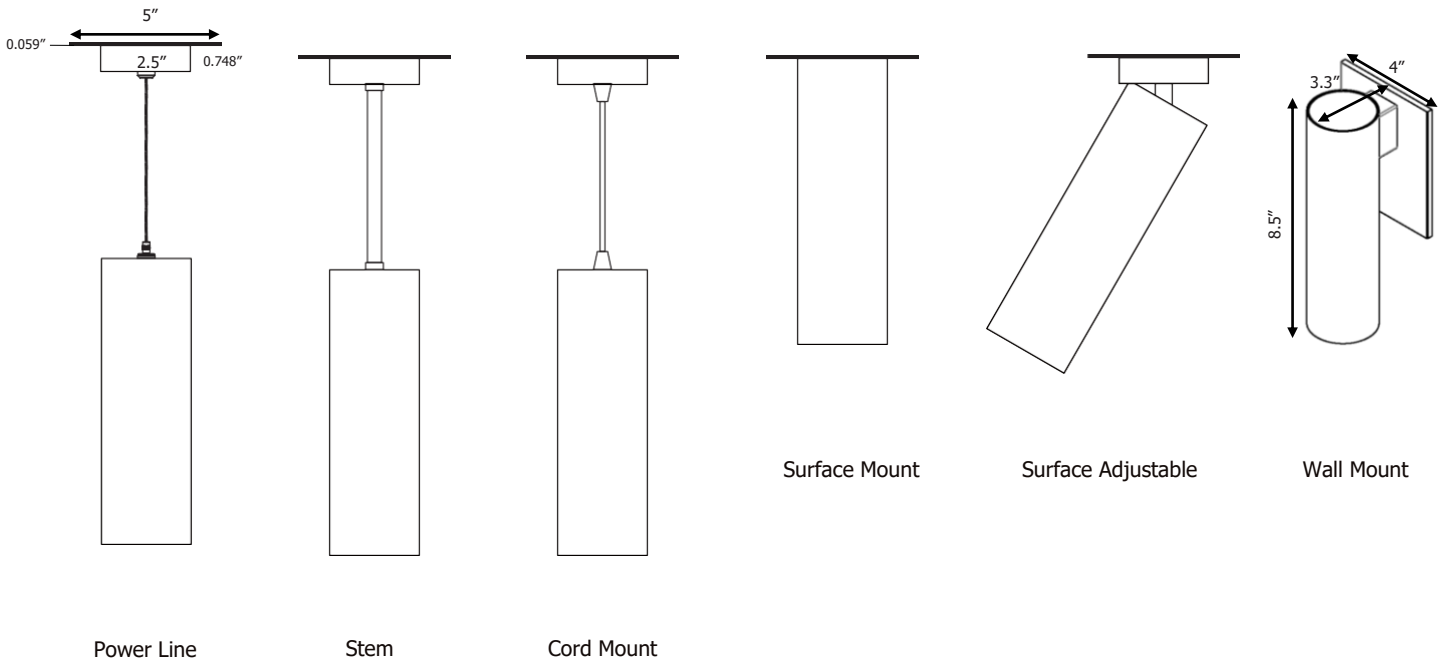

Remote Power

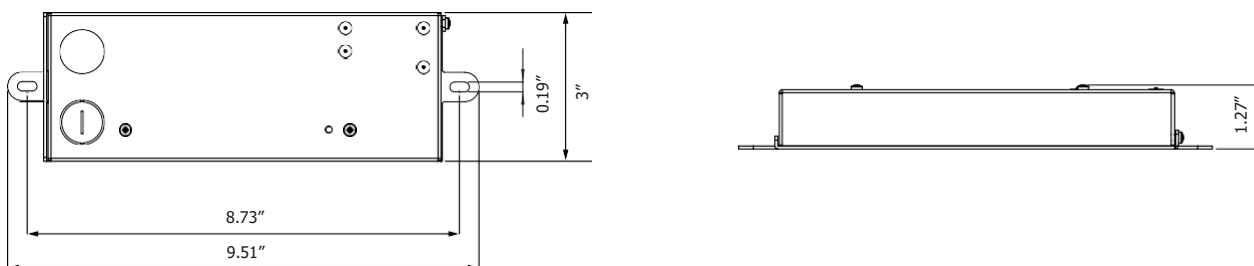

Specification

ADVANCED HIGH CEILING

DOT 2.5 - Warm Dim

METEOR