

# DOT 2.5 - Warm Dim



New Dot 2.5 aperture micro cylinders with up to 1000 lumen output package. Smooth Dim to Dark compatibility with Ward Dim Color Tuning.

|          |  |      |  |
|----------|--|------|--|
| Quantity |  | Type |  |
| Project  |  | Note |  |

## Delivered Lumens

| Warm Dim          | 1900K |        |        |        |        |        | 2700K |
|-------------------|-------|--------|--------|--------|--------|--------|-------|
| 0-10V CCT Voltage | 0.7   | 2      | 4      | 6      | 8      | 10     |       |
| 15W               | 43 lm | 153 lm | 298 lm | 468 lm | 638 lm | 850 lm |       |

\*Tolerance±8%

### Electrical System

- 1000 lm (15W)
- Power Input: Universal (120-277V)
- Operating Temperature: 14°F~95°F
- Surge Protection: 2.5KV

### LED Technology

- Warm Dim™ (Tuning White: 1900K ↔ 2700K)
- 93 CRI
- UGR ≤19
- Beam Angle: 25°, 45°, 60°

### Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to dark
- TRIAC: Line-voltage phase control, dims to 1% (120V only)

### Housing

- Diameter: 2.5" (60mm)
- Height: 8.5" (216.5mm)
- Material: Aluminum
- Weight: 1.9 lbs

### Mounting

- Surface Mount
- Stem 2ft or 4ft
- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft
- Cord Mount 10ft
- Wall Mount
- Surface Adjustable

### Warranty

- 5-year limited warranty

### Listing

- ETL Damp Location Listed
- CE



# DOT 2.5 - Warm Dim








## How To Specify:

**Ordering Example: DT2-15-WDIM-UNV-STV-25-BLK-BLK-SUM-SL**


**4-5 weeks lead time on over 75% of specifications.**

| Model           | Wattage       | CCT / CRI                 | Voltage             | Dimming  |
|-----------------|---------------|---------------------------|---------------------|--|
| DT2             |               | WDIM                      | UNV                 |  |
| DT2<br>DOT 2.5" | <b>15</b> 15W | <b>WDIM</b> 1900K - 2700K | <b>UNV</b> 120-277V | <b>STV</b> Standard 0-10V dims to 10%<br><b>SPV</b> Superior 0-10V dims to dark<br><b>TRC</b> TRIAC dims to 1% (120V ONLY) |

| Beam Angle    | Finish            | Trim Finish   | Mounting                                      | Accessories                            |
|---------------|-------------------|---|---|--|
|               |                   |   |   | SL                                     |
| <b>25</b> 25° | <b>BLK</b> Black  | <b>BLK</b> Black  | <b>SUM</b> Surface Mount                      | <b>SL<sup>1</sup></b> Solite Lens      |
| <b>35</b> 35° | <b>WHT</b> White  | <b>WHT</b> White  | <b>ST2</b> Stem 2ft                           |  |
| <b>45</b> 45° | <b>SLV</b> Silver | <b>SLV</b> Silver   | <b>ST4</b> Stem 4ft                           |  |
| <b>60</b> 60° |                   | <b>GLD</b> Gold   | <b>PL2<sup>1</sup></b> Power Line Mount 2ft   |  |
|               |                   | <b>BL</b> Blue  | <b>PL4<sup>1</sup></b> Power Line Mount 4ft   |  |
|               |                   |  Black | <b>PL6<sup>1</sup></b> Power Line Mount 6ft   |  |
|               |                   |  WHT   | <b>PL8<sup>1</sup></b> Power Line Mount 8ft   |  |
|               |                   |  SLV   | <b>PL10<sup>1</sup></b> Power Line Mount 10ft | <sup>1</sup> Must include Solite Lens. |
|               |                   |  GLD   | <b>CM10</b> Cord Mount 10ft                   |  |
|               |                   |  Blue  | <b>WLM</b> Wall Mount                         |  |
|               |                   |   | <b>SA</b> Surface Adjustable                  |  |

<sup>1</sup>Option only available with Remote Power

**Dimensions**





**Current Consumption**


| Wattage \ Volt | 120V  | 277V  |
|----------------|-------|-------|
| 15W            | 0.14A | 0.06A |

**Mounting Options**


(Canopy Dimensions are the same for all)

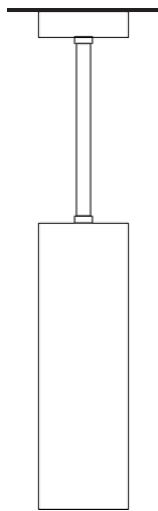


Stem

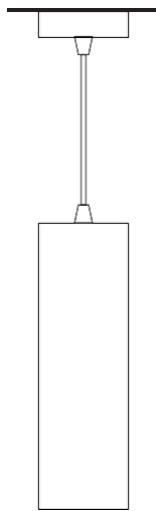


Cord Mount



Surface Mount



Surface Adjustable

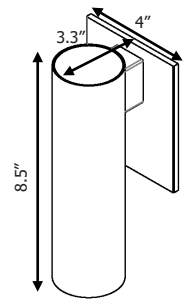

Wall Mount

Power Line

**Remote Power**

