

Edge 4 - Standard



Architectural & Powerful 4 Inch Luminaire

4-inch aperture square pendant with a lumen package range of 1300 - 4000 lumens. Compatible with all 0-10v dimming controls and DMX dimming with ANSI E1.20 RDM Protocol. This aesthetic luminaire is designed to elevate and illuminate beautiful spaces.

Quantity	Type
Project	Note

Electrical System

- 1300lm (15W)
- 2200lm (25W)
- 3150lm (35W)
- 4000lm (45W)
- Power Input: Universal (120-277V)
- Operating Temperature: 14°F~104°F
- Surge Protection: 2.5KV
- Power Factor Greater than 0.9

Housing

- Diameter: 4" (102mm)
- Height: 9.5" (240mm)
- Material: Aluminum
- Weight: 8 lbs

LED Technology

- 2700K, 3000K, 3500K, 4000K
- 85 CRI, 93 CRI
- Beam Angle: 35°, 45°, 60°, WD
- Rated Life > 60,000 Hours (L70)

Mounting

- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft with0 High Lumen Power Suspension
- Stem 2ft or 4ft
- Cord Mount 10ft
- Surface Mount
- Wall Mount

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to 1%
- DMX: high resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)
- LTE: Hi-Lume 1% 2-wire LED Driver (120V forward phase only)
- LDE1: Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black (UNV only)

Warranty

- 5-year limited warranty

Listing

- ETL Listed



Edge 4 - Standard



How to Specify:

Ordering Example: ED4-15-408-UNV-SPV-25-BLK-BLK-PL2

4-5 weeks lead time on over 75% of specifications.

Wattage		CCT / CRI		Voltage		Dimming	
ED4				UNV			
ED4	15 15W	278 2700K / CRI85		UNV 120-277V	STV	Standard 0-10V dims to 10%	
Edge 4	25 25W	308 3000K / CRI85			SPV	Superior 0-10V dims to 1%	
	35 35W	358 3500K / CRI85			DMX(RJ45)¹	DMX dims to 0.1% (RJ45 Sockets)	
	45 45W	408 4000K / CRI85			LTE	Hi-Lume 1% 2-wire LED Driver (120V forward phase only)	
		279 2700K / CRI93			LDE1	Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black (UNV only)	
		309 3000K / CRI93					
		359 3500K / CRI93					
¹ Option is only compatible with remote power canopy.							

Beam Angle		Finish		Trim Finish		Mounting		Option	
35	35°	BLK	Black	BLK	Black	PL2	Surface Mount	RM	Remote Power
45	45°	WHT	White	SLV	Silver	PL4	Stem 2ft		
60	60°					PL6	Stem 4ft		
WD*	WIDE					PL8	Power Line Mount 2ft		
						PL10	Power Line Mount 4ft		
						CM10	Power Line Mount 6ft		
						ST2	Power Line Mount 8ft		
						ST4	Power Line Mount 10ft		
						SUM*	Cord Mount 10ft		
*Please factor in change in lumen output with diuuser - 20%.		*All finishes come with standard black reflector.				*Option is not compatible with remote power.		*Remote Power comes with a Shallow canopy.	

Edge 4 - Standard



Delivered Lumens*

Wattage	15W	25W	35W	45W
CCT	Beam Angle: 35°			
4000K	1330 lm	2160 lm	3150 lm	4000 lm
3500K	1300 lm	2100 lm	3060 lm	3820 lm
3000K	1260 lm	2030 lm	2910 lm	3700 lm
2700K	1200 lm	1950 lm	2850 lm	3550 lm

*Tolerance±8%

DMX Requirements*


The Edge 4 LED fixture with DMX is a ONE CHANNEL DMX unit.

When placing order, please indicate DMX address. (The DMX address will be listed on the back of the fixture.)


The LED fixture provide RJ45 Socket socket to connect. (DMX cable NOT included.)

The final fixture should be terminated by the use of DMX Terminator (by others).

CONNECTION	RJ45 (CAT5e)
Common	WHITE/BROWN(PIN7) & BROWN(PIN 8)
Signal -	ORANGE(PIN 2)
Signal +	WHITE/ORANGE(PIN 1)
Spare	-
Spare	-



Dimensions

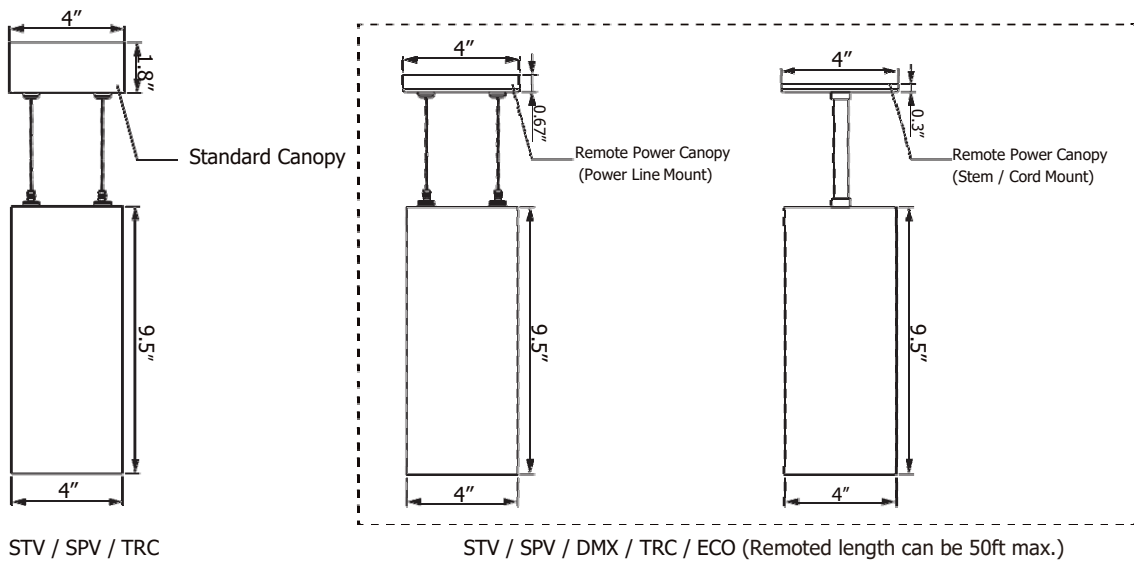


Mounting Options


Standard Driver-In Canopy Mounting Options



Power Line



Stem



Cord Mount




Surface Mount
(Only standard canopy)


Remote Driver Canopy Mounting Options



Power Line



Stem



Cord Mount

Edge 4 - Standard

Remote Power Box

