

ADVANCED HIGH CEILING

Tetriss 2.0 - All White



High-performing modular luminaire with lumen output 16600-60300lm for replacement of up to 1500W Metal Halide. Additional features include IP65, outdoor/natatorium rating.

- Outdoor/Natatorium Rating
(Please refer to Outdoor/Natatorium Version spec sheet)

Quantity	Type
Project	Note

Electrical System

- 20100 lm (200W)
- 40200 lm (400W)
- 60300 lm (600W)
- Power Input: Universal (120-277V); HVT (347-480V)
- Operating Temperature: -40°F~112°F
- Surge Protection: 10KV

LED Technology

- 3000K, 4000K , 5000K
- 75 CRI, 85 CRI
- Beam Angle: 25°, 40°, 60°
- Rated Life > 60,000 hours (L70)

Advanced Dimming

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V dims to 10%
- Superior 0-10V: dims to 1%
- DMX: high resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Material: Aluminum, Tempered Glass
- Weight: 200W / 18lbs, 400W / 37.48lbs, 600W /

Mounting

- Bracket Mount
- (AC/Dimming cable length: Standard /

Warranty

- 5 years limited warranty.

Listing

- ETL Damp Location Listed
- CE



ADVANCED HIGH CEILING

Tetriss 2.0 - All White



How To Specify:

Ordering Example: TSW-400-507-UNV-DMX-25-BLK-BRK

Model	Wattage	CCT / CRI	Voltage	Dimming
TSW			UNV	
TSW	200 200W	308 3000K / CRI85	UNV 120-277V	STV Standard 0-10V dims to 10%
Tetriss Solid White	400 400W	408 4000K / CRI85	HVT 347-480V	SPV Superior 0-10V dims to dark
	600 600W	507 5000K / CRI85		DMX DMX <0.1% (XLR Sockets)

Beam Angle	Finish	Mounting	Accessories
	BLK	BRK	
	BLK Black	BRK Bracket Mount	
25 25°			GSB* Glare Shield Baffe
40 40°			GSV* Glare Shield Visor
60 60°			EMP Remote Emergency Pack
			SLP Slipfetter
² Please factor in change in lumen output of -25%			


Tetriss 2.0 - All White

Delivered


Wattag CCT	200W	400W	600W
5000K	20100 lm	40200 lm	60300 lm
4000K	17700 lm	35400 lm	53010 lm
3000K	16600 lm	33200 lm	49600 lm

*Tolerance±8%


Dimen-

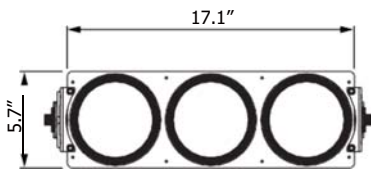

200W / 3 Modules

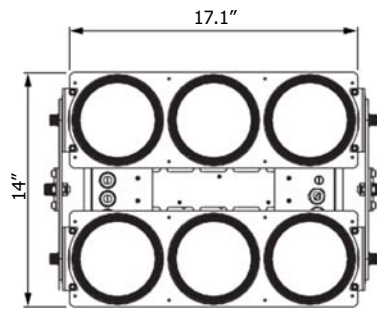


400W / 6 Modules

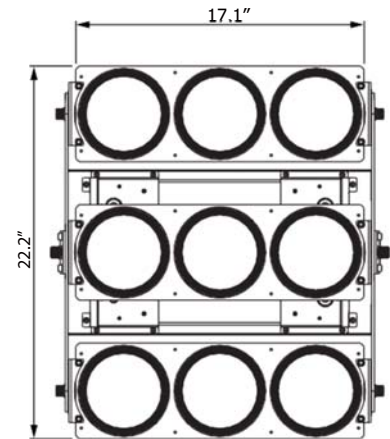


600W / 9 Modules


Mounting Options

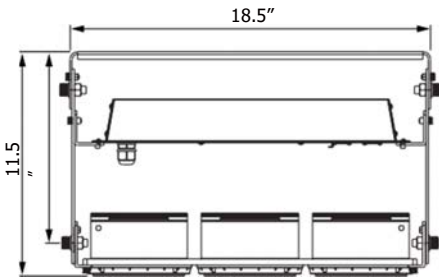




Bracket Mount / 3 Modules

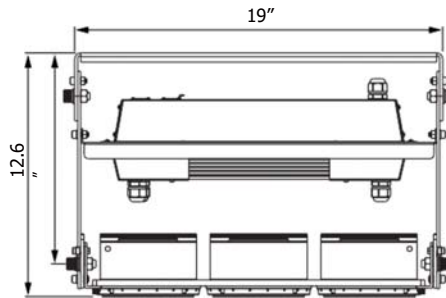

Bracket Mount / 6 Modules

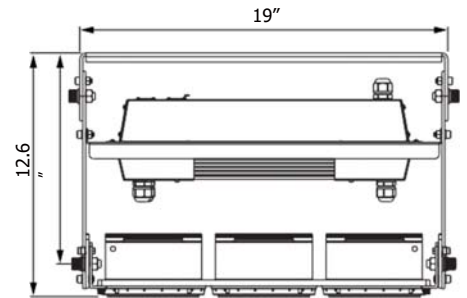

Bracket Mount / 9 Modules

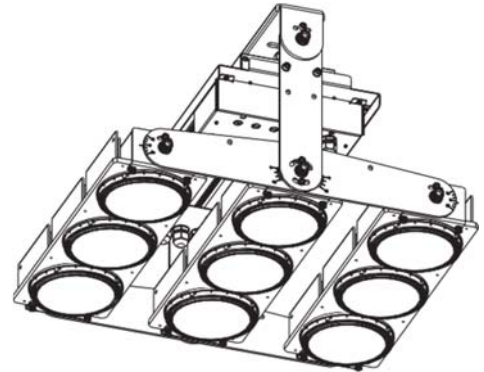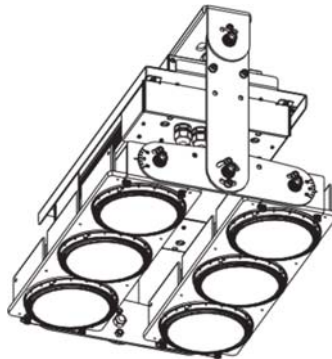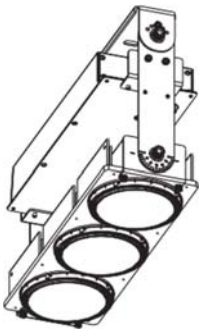

Accessory

Glare Shield Baffle

Glare Shield Visor

