#### ADVANCED HIGH CEILING

## Orion 4 - Standard





#### Architectural & Powerful 4 Inch Luminaire

4-inch aperture round pendant with a lumen package range of 1300 - 4000 lumens. Compatible with all 0-10v dimming controls and DMX dimming with ANSI E1.20 RDM Protocol. This aesthetic luminaire is designed to elevate and illuminate beautiful spaces.

Quantity	Type	
Projec	Note	

#### **Electrical System**

- 1300lm (15W)

2200lm (25W)

3150lm (35W)

4000lm (45W)

- Power Input: Universal (120-277V)- Operating Temperature: 14°F~104°F

- Surge Protection: 2.5KV

- Power Factor Greater than 0.9

### **LED Technology**

- 2700K, 3000K, 3500K, 4000K

-85 CRI, 93 CRI

- Beam Angle: 35°, 45°, 60°, WD

- UGR ≤19

- Rated Life > 60,000 Hours (L70)

#### **Mounting**

Housing

- Diameter: 4" (102mm)

- Height: 9.5" (240mm)

- Material: Aluminum

- Weight: 8 lbs

- Power Line Mount 2ft, 4ft, 6ft, 8ft, 10ft with High Lumen Power Suspension

- Stem 2ft or 4ft

- Cord Mount 10ft

- Surface Mount

### **Advanced Dimming**

(Proprietary VX Driver is incorporated to all dimming options for video flicker-free lighting)

- Standard 0-10V: dims to 10%
- Superior 0-10V: dims to 1%
- DMX: high resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)
- LTE: Hi-Lume 1% 2-wire LED Driver (120V forward phase only)
- LDE1: Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black (UNV only)

### Warranty

- 5-year limited warranty

#### Listing

- ETL Listed



ADVANCED HIGH CEILING

# Orion 4 - Standard



**How to Specify:** 

Ordering Example: OR4-15-408-UNV-SPV-35-BLK-GLD-PL2

4-5 weeks lead time on over 75% of specifications.

Model	Wa	Wattage		CCT / CRI		oltage		Dimming
OR4						UNV		
OR4	15	15W	278	2700K / CRI85	UNV	120-277V	STV	Standard 0-10V dims to 10%
Orion 4	25	25W	308	3000K / CRI85			SPV	Superior 0-10V dims to 1%
	35	35W	358	3500K / CRI85			DMX(RJ45) <sup>1</sup>	DMX dims to 0.1% (RJ45 Sockets)
	45	45W	408	4000K / CRI85			LTE	Hi-Lume 1% 2-wire LED Driver (120V forward phase only)
			279	2700K / CRI93			LDE1	Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black (UNV only)
			309	3000K / CRI93				
			359	3500K / CRI93				

Beam Angle		Finish		Trim Finish			Mounting		Option	
35	35°	BLK	Black	BLK	Black	PL2	Power Line Mount 2ft	RM	Remote Power	
45	45°	WHT	White	SLV	Silver	PL4	Power Line Mount 4ft			
60	60°					PL6	Power Line Mount 6ft			
WD*	WIDE					PL8	Power Line Mount 8ft			
						PL10	Power Line Mount 10ft			
						CM10	Cord Mount 10ft			
						ST2	Stem 2ft			
						ST4	Stem 4ft			
		Black	White	Black	Silver	SUM*	Surface Mount			
*Please factor in change in lumen output with diffuser -20%.		*All finish with stan- reflector.	es come dard black			*Option is n	ot compatible with remote power.	*Remote P Shallow ca	ower comes with a mopy.	



#### **Delivered Lumens\***

Wattage	15W	25W	35W	45W				
ССТ	Beam Angle: 35°							
4000K	1330 lm	2160 lm	3150 lm	4000 lm				
3500K	1300 lm	2100 lm	3060 lm	3820 lm				
3000K	1260 lm	2030 lm	2910 lm	3700 lm				
2700K	1200 lm	1950 lm	2850 lm	3550 lm				

<sup>\*</sup>Tolerance 8%

#### **DMX Requirements\***


The Orion 4 LED fixture with DMX is a ONE CHANNEL DMX unit.

When placing order, please indicate DMX address. (The DMX address will be listed on the back of the fixture.)

The LED fixture provides RJ45 Socket to connect. (DMX cable NOT included.)

The final fixture should be terminated by the use of DMX Terminator (by others).

CONNECTION	RJ45 (CAT5e)		
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)		
Signal -	ORANGE (PIN 2)		
Signal +	WHITE/ORANGE (PIN 1)		
Spare	-		
Spare	-		




#### **Compatible DMX Cabling List**

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 for DMX installation. Belden 9729 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed. Below is a list of other compatible Belden cables.




#### **Dimensions**

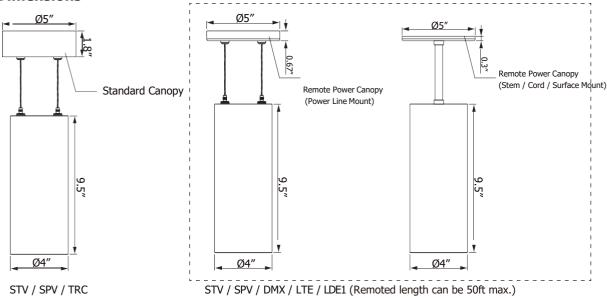


### **Mounting Options**

## Standard Driver-In Canopy Mounting Options

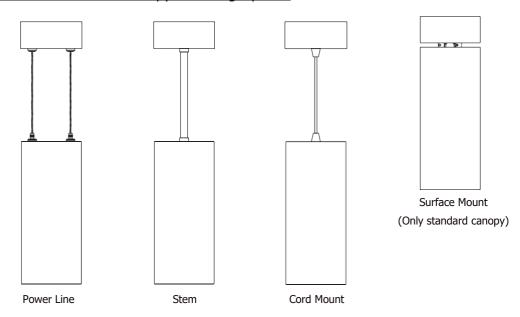



## **Remote Driver Canopy Mounting Options**

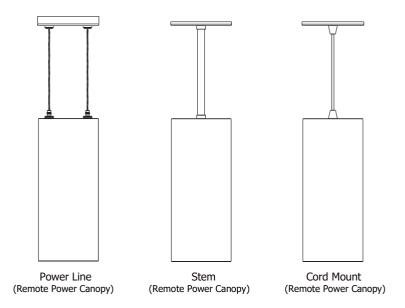



#### **Remote Power Box**

